

深圳市九扬智能科技有限公司

产品规格书

Product Type: 10.4" TFT LCD Module

LCD Interface: 60PIN LVDS

Luminance: 600 cd/m²

Module No: HSD104IXN1-A00-1JC

CUSTOMER APPROVED	PREPARE BY	CHECK BY	APPROVED BY
SUPPLIER APPROVED	PREPARE BY	CHECK BY	APPROVED BY

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	2/26
Document No.		Revision	1.0

Record of Revisions

Rev.	Date	Sub-Model	Description of change
1.0	Feb. 3, 2018		Tentative Product Specification was first released.

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	3/26
Document No.		Revision	1.0

Contents

1.0	General description	p.4
2.0	Absolute maximum ratings.....	p.5
3.0	Optical characteristics.....	p.6
4.0	Block diagram	p.10
5.0	Interface pin connection	p.12
6.0	Electrical characteristics	p.15
7.0	Reliability test items	p.20
8.0	Outline dimension	p.21
9.0	Lot mark	p.23
10.0	Package specification	p.24
11.0	General precaution	p.26

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	4/26
Document No.		Revision	1.0

1.0 GENERAL DESCRIPTION

1.1 Introduction

HannStar Display model HSD104IXN1-A00-1JC is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit and a back light system. This TFT LCD has a 10.4 inch diagonally measured active display area with HD (1024 horizontal by 768 vertical pixel) resolution.

1.2 Features

- 10.4 (4:3 diagonal) inch configuration
- 16.2M
- ROHS / Halogen Free Compliance

1.3 Applications

- Automobile

1.4 General information

Item		Specification	Unit
Outline Dimension		236 (H) x 174.3 (V) x 7.4 (D) (Typ)	mm
Display area		211.2(H) x 158.4(V) (10.4" diagonal)	mm
Number of Pixel		1024(H) x 768(V)	pixels
Pixel pitch		0.20625(H) x 0.20625(V)	mm
Pixel arrangement		RGB Vertical Stripe	
Display mode		Normally Black	
NTSC		70(Typ.)	%
Surface treatment		Antiglare, Hard-Coating (3H)	
Weight		314	g
Back-light		Single LED (Side-Light type)	
Power Consumption	Logic System (White Pattern)	Logic 2.0W(max) @V _{DVD} =3.3V	W
	B/L System	6.144(Max.)	W

1.5 Mechanical Information

Item		Min.	Typ.	Max.	Unit
Module Size	Horizontal (H)	235.5	236	236.5	mm
	Vertical (V)	174.0	174.3	174.6	mm
	Depth (D)	5.3	5.6	7.4	mm
Weight		—	314	—	g

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	5/26
Document No.		Revision	1.0

2.0 ABSOLUTE MAXIMUM RATINGS

2.1 Electrical Absolute Rating

2.1.1 TFT LCD Module

Item	Symbol	Min.	Max.	Unit	Note
Power supply voltage	V_{DVDD}	-0.3	5	V	
	V_{DVDD_LVDS}				
	V_{AVDD}	-0.5	15	V	
	V_{GH}	-0.3	42	V	
	V_{GL}	-20	0.3	V	
	$V_{GH} - V_{GL}$	-0.3	40	V	
Logic Signal Input Level	V_{DVDD} V_{DVDD_LVDS}	-0.3	5	V	

2.2 Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Note
Operating Temperature	T_{opa}	-20	70	°C	
Storage Temperature	T_{stg}	-30	80	°C	

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	6/26
Document No.		Revision	1.0

3.0 OPTICAL CHARACTERISTICS

3.1 Optical specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast		CR	$\Theta=0$ Normal viewing angle	600	900	—		(1)(2)
Response time	Rising	TR+TF		—	30	40	msec	(1)(3)
	Falling							
White luminance (Center)		Y_L		500	600	—	cd/m ²	(1)(4) ($I_L=480mA$)
Color chromaticity (CIE1931)	White	W_x		0.273	0.313	0.353		(1)(4)
		W_y		0.289	0.329	0.369		
	Red	R_x		0.614	0.654	0.694		
		R_y		0.301	0.341	0.381		
	Green	G_x		0.264	0.304	0.344		
		G_y		0.585	0.625	0.665		
	Blue	B_x	0.104	0.144	0.184			
		B_y	0.05	0.090	0.13			
Viewing angle	Hor.	Θ_L	CR>10	80	85	—		
		Θ_R		80	85	—		
	Ver.	Θ_U		80	85	—		
		Θ_D		80	85	—		
Brightness uniformity		B_{UNI}	$\Theta=0$	70	80	—	%	(5)
Optima View Direction		Free						(6)

3.2 Measuring Condition

- Measuring surrounding : dark room
- LED current I_L : 480mA
- Ambient temperature : 25±2°C
- 15min. warm-up time.


深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	7/26
Document No.		Revision	1.0

3.3 Measuring Equipment

- FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.
- Measuring spot size : 20 ~ 21 mm

Note (1) Definition of Viewing Angle:

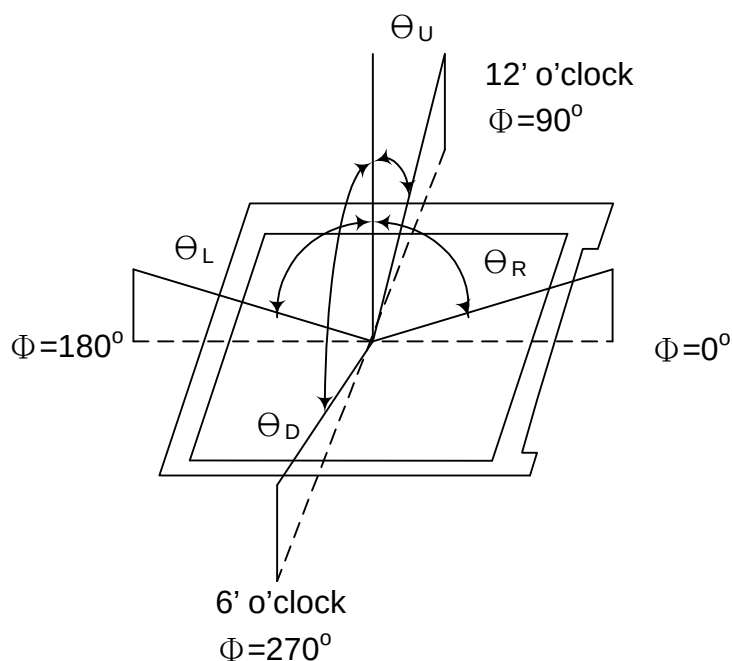


Note (2) Definition of Contrast Ratio (CR) :
measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$


深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	8/26
Document No.		Revision	1.0

Note (3) Definition of Response Time : Sum of T_R and T_F

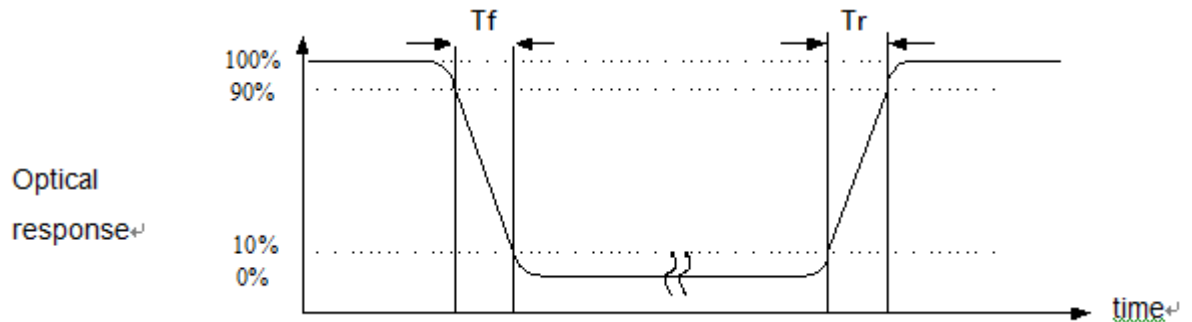


Note (4) Definition of optical measurement setup

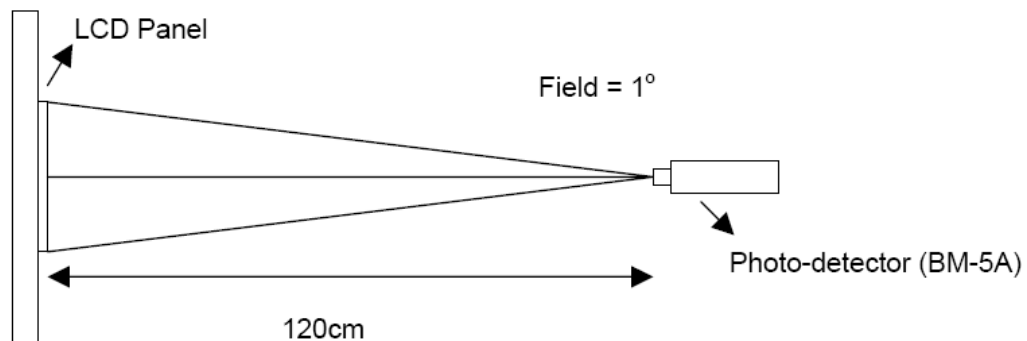

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	9/26
Document No.		Revision	1.0

Note (5) Definition of brightness uniformity

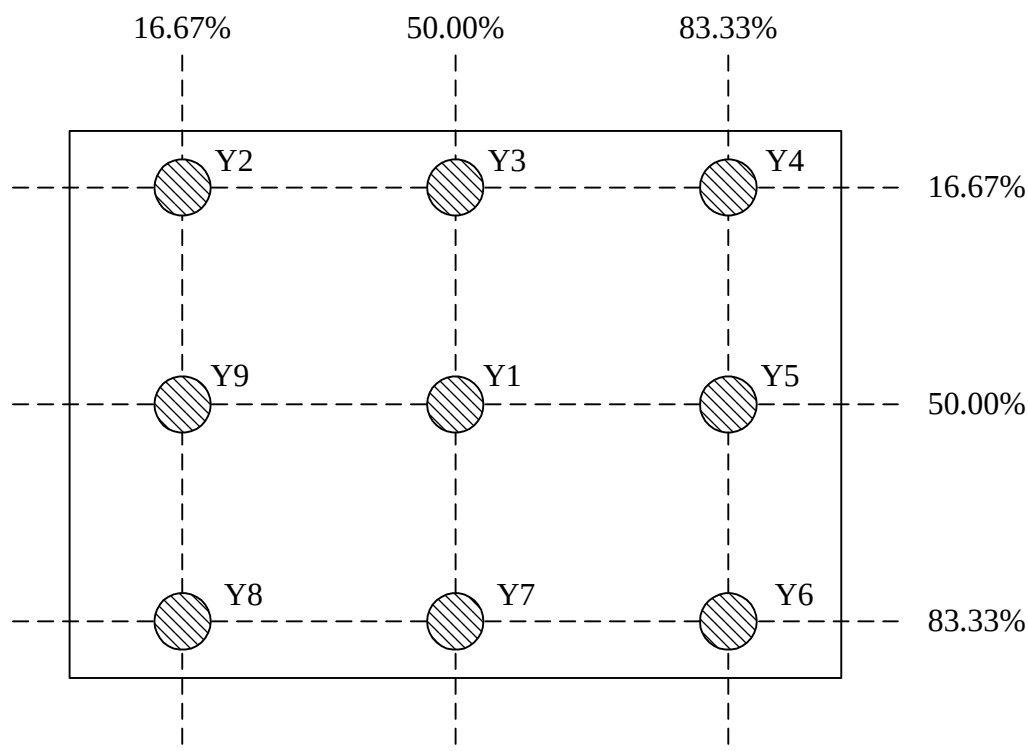

$$\text{Luminance uniformity} = \frac{(\text{Min Luminance of 9 points})}{(\text{Max Luminance of 9 points})} \times 100\%$$


Note (6) : Rubbing Direction (The different Rubbing Direction will cause the different optima view direction.

深圳市九扬智能科技有限公司


Document Title	HSD104IXN1-A00-1JC	Page No.	10/26
Document No.		Revision	1.0

4.0 BLOCK DIAGRAM

4.1 TFT LCD Module:

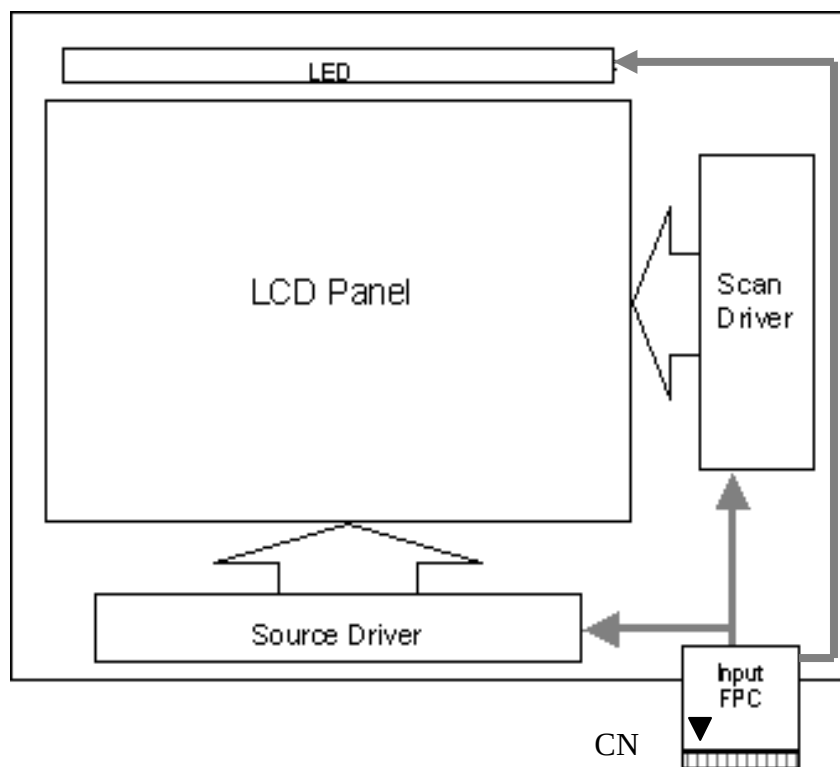

4.2 Pixel Format

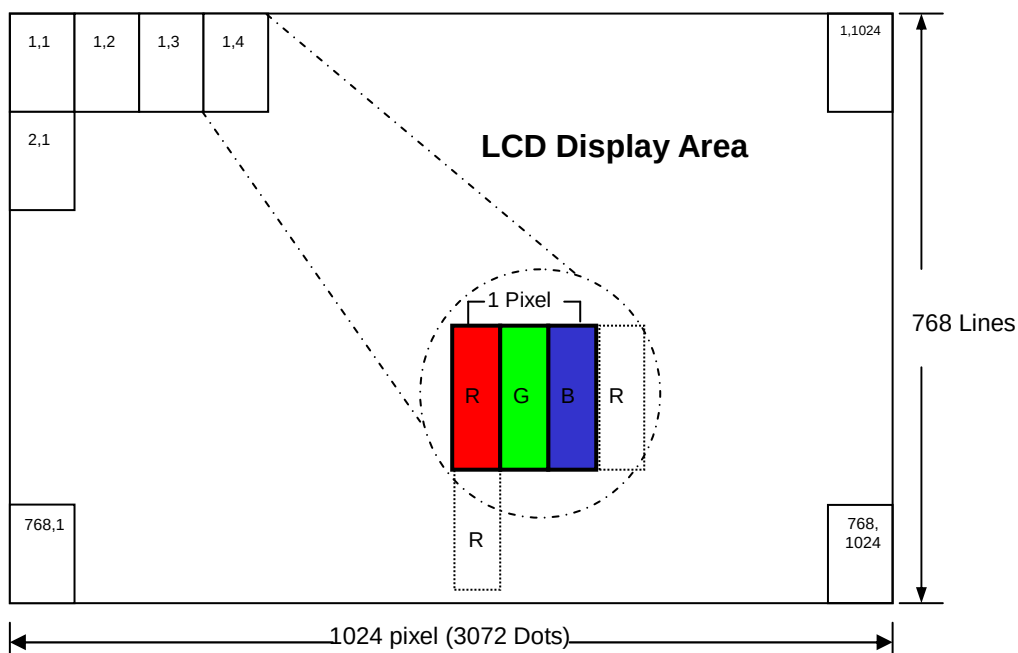

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	11/26
Document No.		Revision	1.0

4.3 Relationship Between Displayed Color and Input

	Display	MSB R7 R6 R5 R4 R3 R2 R1 R0	LSB G7 G6 G5 G4 G3 G2 G1 G0	MSB B7 B6 B5 B4 B3 B2 B1 B0	Gray scale Level
Basic color	Black	L L L L L L L L	L L L L L L L L	L L L L L L L L	-
	Blue	L L L L L L L L	L L L L L L L L	H H H H H H H H	-
	Green	L L L L L L L L	H H H H H H H H	L L L L L L L L	-
	Light Blue	L L L L L L L L	H H H H H H H H	H H H H H H H H	-
	Red	H H H H H H H H	L L L L L L L L	L L L L L L L L	-
	Purple	H H H H H H H H	L L L L L L L L	H H H H H H H H	-
	Yellow	H H H H H H H H	H H H H H H H H	L L L L L L L L	-
	White	H H H H H H H H	H H H H H H H H	H H H H H H H H	-
Gray scale of Red	Black	L L L L L L L L	L L L L L L L L	L L L L L L L L	L0
	Dark ↑ ↓ Light	L L L L L L L H	L L L L L L L L	L L L L L L L L	L1
		L L L L L L L L	L L L L L L L L	L L L L L L L L	L2
		:	:	:	L3...L251
		H H H H H H L L	L L L L L L L L	L L L L L L L L	L252
	Light	H H H H H H L H	L L L L L L L L	L L L L L L L L	L253
		H H H H H H H L	L L L L L L L L	L L L L L L L L	L254
	Red	H H H H H H H H	L L L L L L L L	L L L L L L L L	Red L255
Gray scale of Green	Black	L L L L L L L L	L L L L L L L L	L L L L L L L L	L0
	Dark ↑ ↓ Light	L L L L L L L L	L L L L L L L H	L L L L L L L L	L1
		L L L L L L L L	L L L L L L H L	L L L L L L L L	L2
		:	:	:	L3...L251
		L L L L L L L L	H H H H H H L L	L L L L L L L L	L252
	Light	L L L L L L L L	H H H H H H L H	L L L L L L L L	L253
		L L L L L L L L	H H H H H H H L	L L L L L L L L	L254
	Green	L L L L L L L L	H H H H H H H H	L L L L L L L L	Green L255
Gray scale of Blue	Black	L L L L L L L L	L L L L L L L L	L L L L L L L L	L0
	Dark ↑ ↓ Light	L L L L L L L L	L L L L L L L L	L L L L L L L H	L1
		L L L L L L L L	L L L L L L L L	L L L L L L H L	L2
		:	:	:	L3...L251
		L L L L L L L L	L L L L L L L L	H H H H H H L L	L252
	Light	L L L L L L L L	L L L L L L L L	H H H H H H L H	L253
		L L L L L L L L	L L L L L L L L	H H H H H H H L	L254
	Blue	L L L L L L L L	L L L L L L L L	H H H H H H H H	Blue L255
Gray scale of White & Black	Black	L L L L L L L L	L L L L L L L L	L L L L L L L L	L0
	Dark ↑ ↓ Light	L L L L L L L H	L L L L L L L H	L L L L L L L H	L1
		L L L L L L H L	L L L L L L H L	L L L L L L H L	L2
		:	:	:	L3...L251
		H H H H H H L L	H H H H H H L L	H H H H H H L L	L252
	Light	H H H H H H L H	H H H H H H L H	H H H H H H L H	L253
		H H H H H H H L	H H H H H H H L	H H H H H H H L	L254
	White	H H H H H H H H	H H H H H H H H	H H H H H H H H	White L255

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	12/26
Document No.		Revision	1.0

5.0 INTERFACE PIN CONNECTION

5.1 FPC Pin Assignment:

FPC connector is used for electronics interface. The recommended model is CN1 (Input signal): 089K60-000100-G2-R (STARCONN)

Pin NO.	Symbol	Description	Note
1	AGND	Analog ground	
2	AVDD	Analog power	
3	DVDD	Digital power	
4	GND	Digital ground	
5	VCOM	Not connect	
6	DVDD	Digital power	
7	GND	Digital ground	
8	V14	Not connect	
9	V13	Not connect	
10	V12	Not connect	
11	V11	Not connect	
12	V10	Not connect	
13	V9	Not connect	
14	V8	Not connect	
15	GND	Digital ground	
16	DVDD_LVDS	LVDS power	
17	GND	Digital ground	
18	PIND3	Positive LVDS differential data input	
19	NIND3	Negative LVDS differential data input	
20	GND	Digital ground	
21	PINC	Positive LVDS differential clock input	
22	NINC	Negative LVDS differential clock input	
23	GND	Digital ground	
24	PIND2	Positive LVDS differential data input	
25	NIND2	Negative LVDS differential data input	
26	GND	Digital ground	
27	PIND1	Positive LVDS differential data input	
28	NIND1	Negative LVDS differential data input	
29	GND	Digital ground	
30	PIND0	Positive LVDS differential data input	

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	13/26
Document No.		Revision	1.0

Pin NO.	Symbol	Description	Note
31	NIND0	Negative LVDS differential data input	
32	GND	Digital ground	
33	GND_LVDS	LVDS ground	
34	GRB	Global reset pin. Active low to enter reset state. Suggest to connecting with an RC reset circuit for stability. Normally pull high. (R=10KΩ,C=0.1uF)	
35	STBYB	Standby mode,normally pull high STBYB= 1, normal operation STBYB=0 ,timing control, source driver will turn off, all output are high-Z	
36	SHLR	Left or right display control	Note 1
37	DVDD	Digital power	
38	UPDN	Up / down display control	Note 1
39	AGND	Analog ground	
40	AVDD	Analog power	
41	VCOM	Not connect	
42	DITH	Dithering function enable control.Normally pull low DITHER= "1",Enable internal dithering function DITHER= "0",Disable internal dithering function	
43	GND	Digital ground	
44	DVDD	Digital Power	
45	GND	Digital ground	
46	V7	Not connect	
47	V6	Not connect	
48	V5	Not connect	
49	V4	Not connect	
50	V3	Not connect	
51	V2	Not connect	
52	V1	Not connect	
53	GND	Digital ground	
54	DVDD	Digital power	


深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	14/26
Document No.		Revision	1.0

Pin NO.	Symbol	Description	Note
55	SELB	6bit/8bit mode select, SELB = "0", LVDS input data is 8bits SELB = "1": LVDS input data is 6bits	Note 2
56	VGH	Positive power for TFT	
57	DVDD	Digital power for Gate IC	
58	VGL	Negative power for TFT	
59	GND	Digital ground for Gate IC	
60	NC	Not connect	

Note 1 : UPDN and SHLR control function

UPDN	SHLR	Data shifting
0	1	Normally display
0	0	Inverse Left and Right
1	1	Inverse Up and Down
1	0	Inverse Left and Right Inverse Up and Down

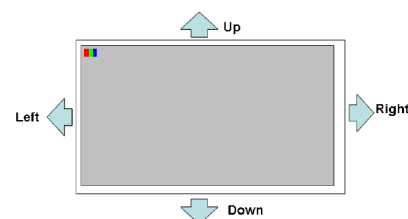

Note 2 : If LVDS input data is 6 bits, SELB must be set to High

If LVDS input data is 8 bits, SELB must be set to Low

DITH and SELB control function

DITH	SELB	Data shifting
0	1	Colors (262K)
0	0	Colors (262K)
1	1	Colors (262K)
1	0	Colors (16.2M)

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	15/26
Document No.		Revision	1.0

6.0 ELECTRICAL CHARACTERISTICS

6.1 TFT LCD Module

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	V_{DVDD}	3	3.3	3.6	V	
	V_{DVDD_LVDS}					
	VGH	24	25	26	V	Note (1)
	VGL	-9	-10	-11	V	Note (2)
	AVDD	11.8	12.1	12.4	V	
Input signal voltage	V_{iH}	0.8 VDD		VDD	V	
	V_{iL}	0		0.2VDD	V	
Current of power supply	IDD		28	36.4	mA	VDD =3.3V/ Note (3)
	Iavdd		75	95	mA	AVDD=12.1V/ Note (3)
	Ivgh		0.85	1.25	mA	VGH=25V/ Note (3)
	Ivgl		1.95	2.54	mA	VGL=-10V/ Note (3)

Note :

(1) : VGH is TFT Gate operating Voltage.

(2) : VGL is TFT Gate operating Voltage.

(3) : @ White Pattern & 60Hz °

6.2 Switching Characteristics for LVDS Receiver


Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High Threshold	V_{th}			100	mV	$V_{CM}=1.2V$
Differential Input Low Threshold	V_{tl}	-100			mV	
Input Current	I_{IN}	-10		10	uA	
Differential input Voltage	$ V_{ID} $	0.1		0.6	V	
Common Mode Voltage Offset	V_{CM}	0.7	1.2	1.6	V	

深圳市九扬智能科技有限公司


Document Title	HSD104IXN1-A00-1JC	Page No.	16/26
Document No.		Revision	1.0

6.3 Bit LVDS input

6.3.1 6bit LVDS input

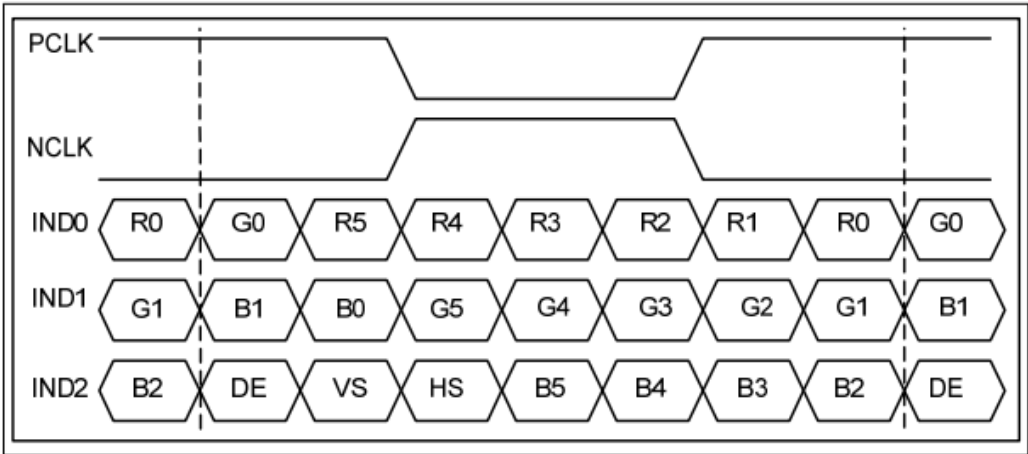

6.3.2 8Bit LVDS input

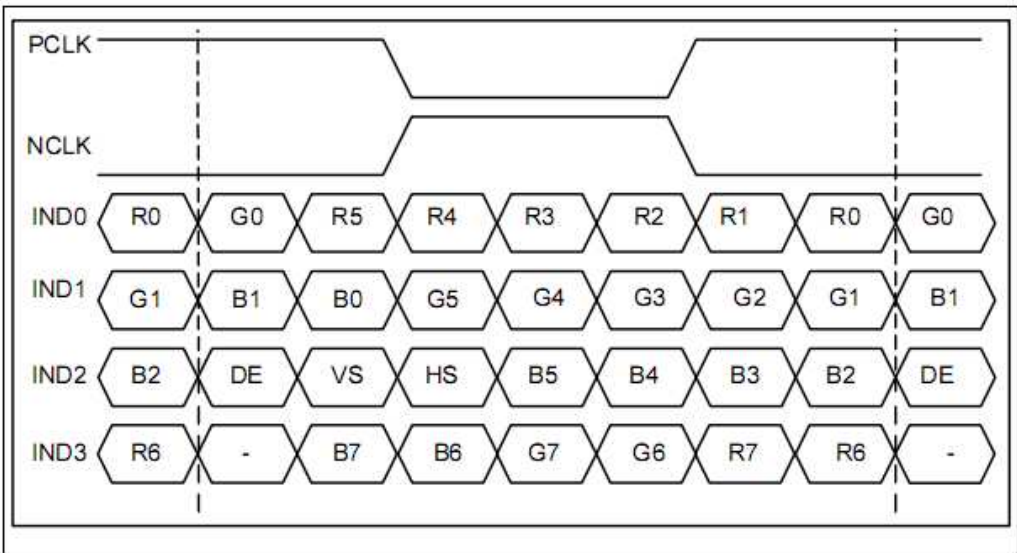

深圳市九扬智能科技有限公司


Document Title	HSD104IXN1-A00-1JC	Page No.	17/26
Document No.		Revision	1.0

6.4 Interface Timing (DE mode)


DE mode					
Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
DCLK frequency @Frame rate=60hz	fclk	52	65	71	Mhz
Horizontal display area	thd	1024			DCLK
HSYNC period time	th	1114	1344	1400	DCLK
HSYNC blanking	thb+thfp	90	320	376	DCLK
Vertical display area	tvd	768			H
VSYNC period time	tv	778	806	845	H
VSYNC blanking	tvb+tvfp	10	38	77	H

Timing Diagram of Interface Signal (DE mode)

(1). Vertical input timing

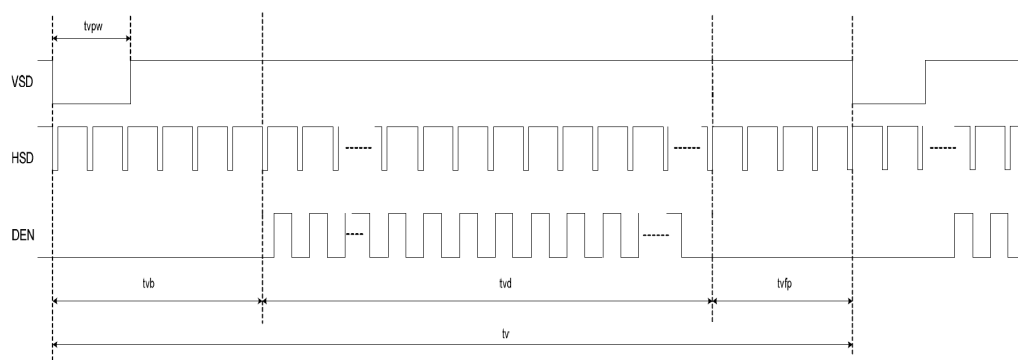

(2). Horizontal input timing

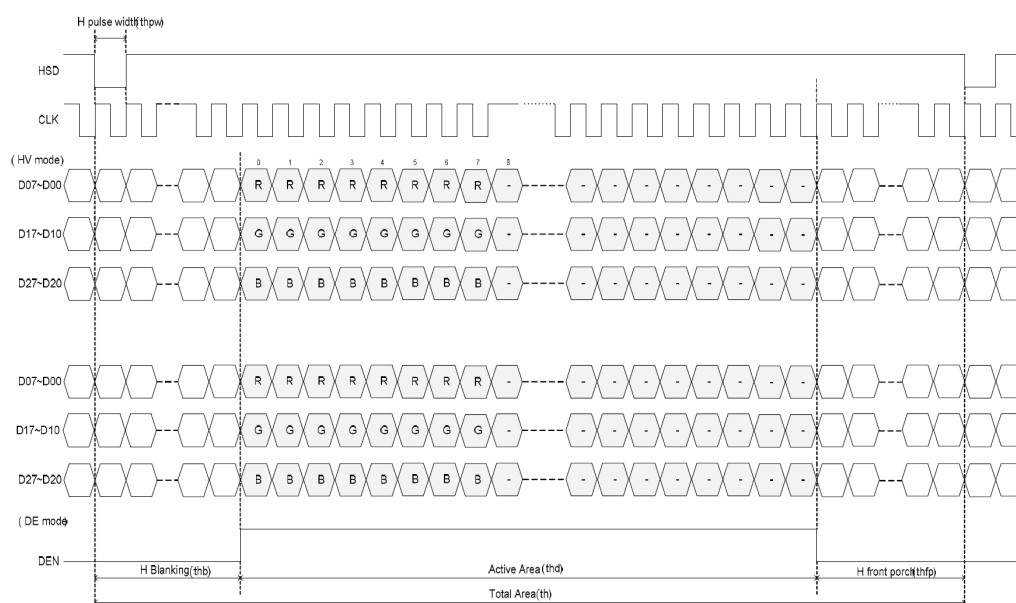


The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	18/26
Document No.		Revision	1.0

6.5 Power On / Off Sequence

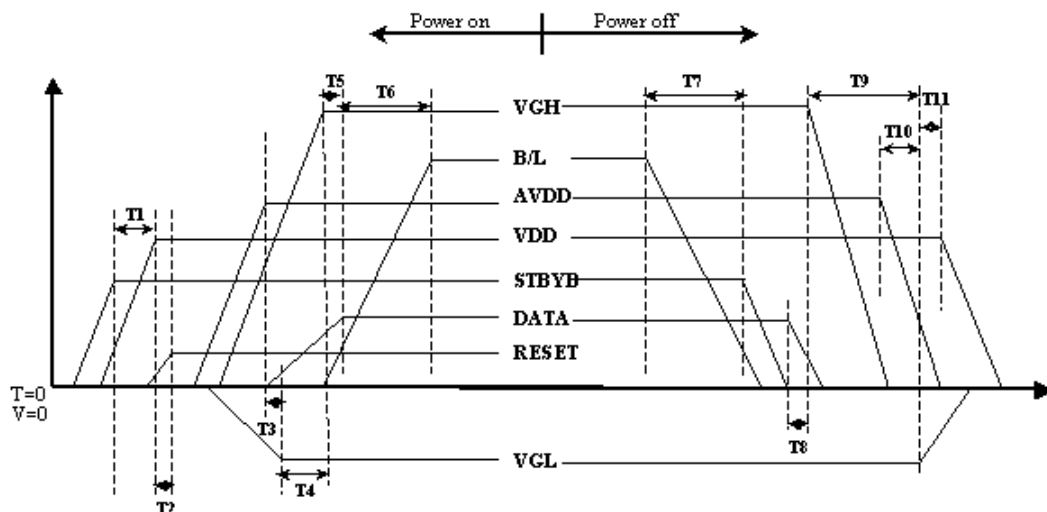

Item	Min.	Typ.	Max.	Unit
T1	0	--	--	ms
T2	50	--	--	ms
T3	5	--	--	ms
T4	10	--	--	ms
T5	20	--	--	ms
T6	50	--	--	ms
T7	20	--	--	ms
T8	10	--	--	ms
T9	20	--	--	ms
T10	10	--	--	ms
T11	20	--	--	ms

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	19/26
Document No.		Revision	1.0


6.6 Backlight Unit

Parameter	Symbol	Min	Typ	Max	Units	Condition
LED Current	I_L	--	480	--	mA	$T_a=25^{\circ}\text{C}$
LED Voltage	V_L	12V	13.2	14	Volt	$T_a=25^{\circ}\text{C}$
LED Life-Time	N/A	30,000	--	--	Hour	$T_a=25^{\circ}\text{C}$ $I_F=60\text{mA}$ Note (2)

Note (1) LED life time (Hr) can be defined as the time in which it continues to operate under the condition: $T_a=25\pm 3^{\circ}\text{C}$, typical I_L value indicated in the above table until the brightness becomes less than 50%.

Note (2) The "LED life time" is defined as the module brightness decrease to 50% original brightness at $T_a=25^{\circ}\text{C}$ and $I_L=480\text{mA}$. The LED lifetime could be decreased if operating I_L is larger than 480mA. The constant current driving method is suggested.

Note (3) LED Light Bar Circuit

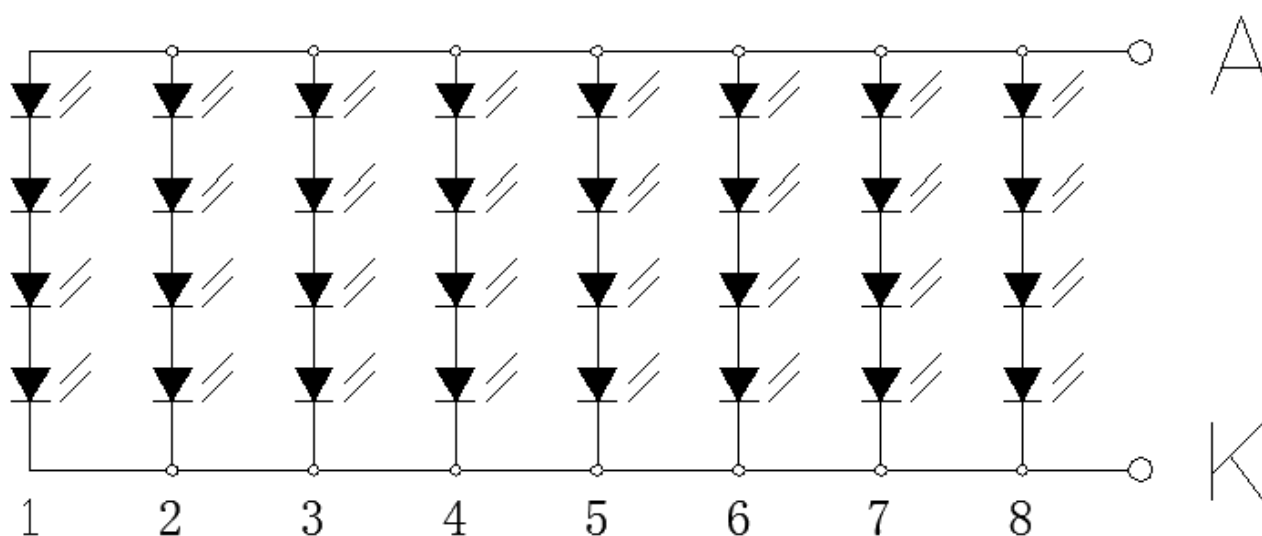

6.7 Electrostatic Discharge:

ITEM	CONDITON	NOTE
ESD	Air 150pF , 330 Ω , +/-15kV & Contact 150 pF , 330 Ω +/-8kV	Note1
	200pF , 0 Ω , +/-200V contact test	Note2

Note: Measure

Note1: LCD glass and metal bezel

Note2: IF connector pins

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	20/26
Document No.		Revision	1.0

7.0 Reliability test items

No.	Item	Conditions	Remark
1	High Temperature Storage	Ta=+80°C, 240hrs	
2	Low Temperature Storage	Ta=-30°C, 240hrs	
3	High Temperature Operation	Ta=+70°C, 240hrs	
4	Low Temperature Operation	Ta=-20°C, 240hrs	
5	High Temperature and High Humidity (operation)	Ta=+60°C, 90%RH, 240hrs	
6	Thermal Cycling Test (non operation)	-30°C(30min) → +80°C(30min), 200 cycles	
7	Electrostatic Discharge	±200V,200pF(0Ω) 1 time/connector	
8	Vibration	1.Random: 1.04G, 5~500Hz, XYZ, 30min/each direction 2.Sine: Freq.1.5G, 8~33.3Hz, Stoke: 1.3mm Sweep: 2.9G, 33.3~400Hz X/Z: 2hrs, Y: 4hrs	
9	Shock	Half-Sine, 100G, 6ms, ±XYZ, 3time	
10	Vibration (with carton)	Random: 0.015G ² /Hz, 5~200Hz -6dB/Octave, 200~400Hz XYZ 各方向 2hrs	
11	Drop (with carton)	Drop height condition, basis on the product weight and follow QB100-0027 1 corner, 3 edges, 6 surfaces	

Note: There is no display function NG issue occurred, all the cosmetic specification is judged before the reliability stress.


深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	21/26
Document No.		Revision	1.0

8.0 OUTLINE DIMENSION

Unit : mm

8.1 Front View:

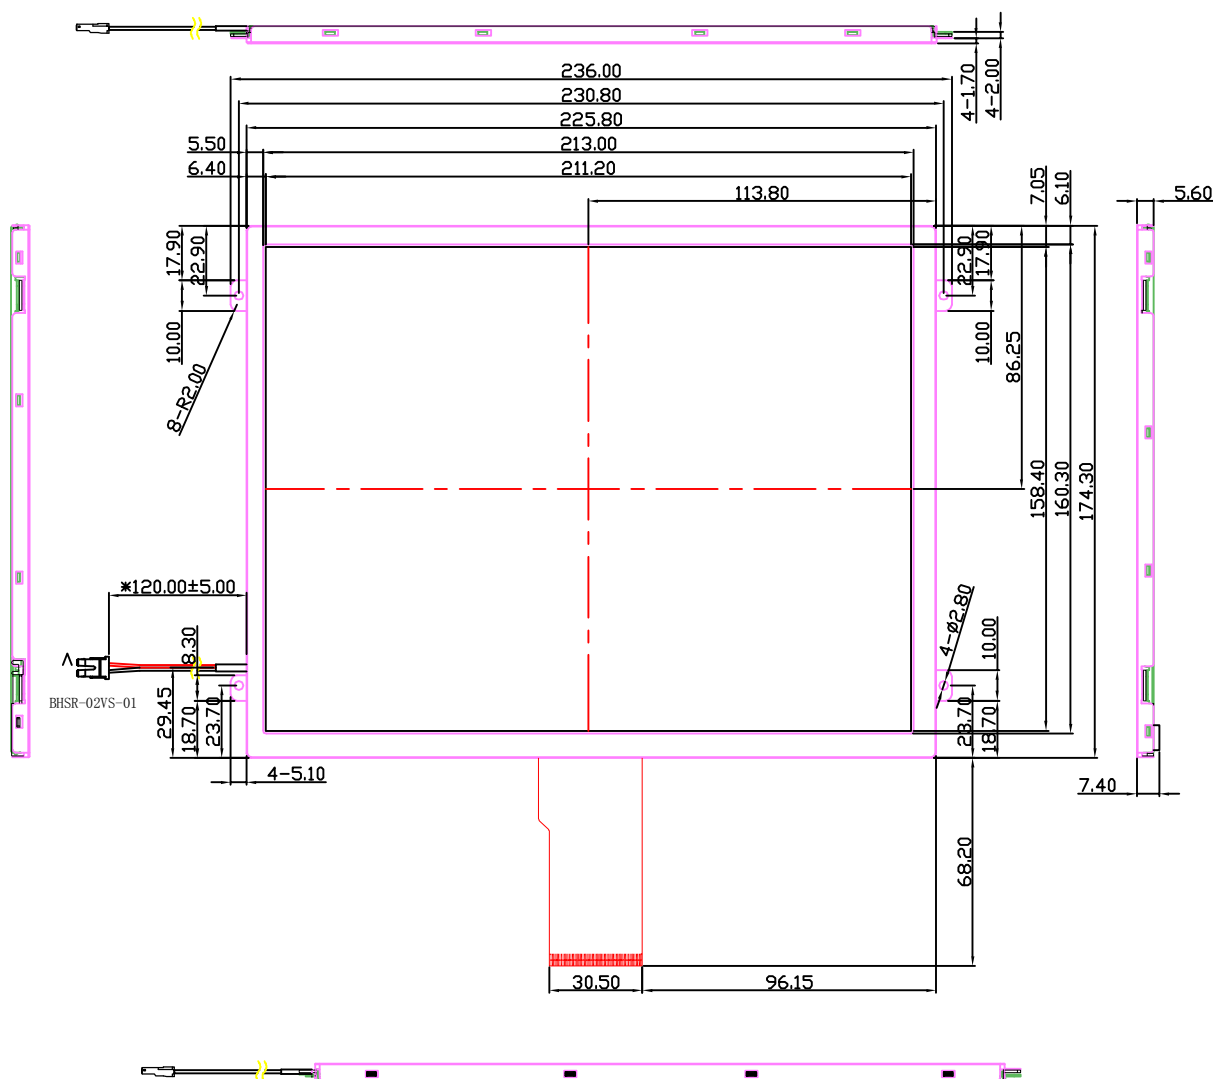


General tolerance: $\pm 0.3\text{mm}$

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	22/26
Document No.		Revision	1.0

8.2 Rear View:

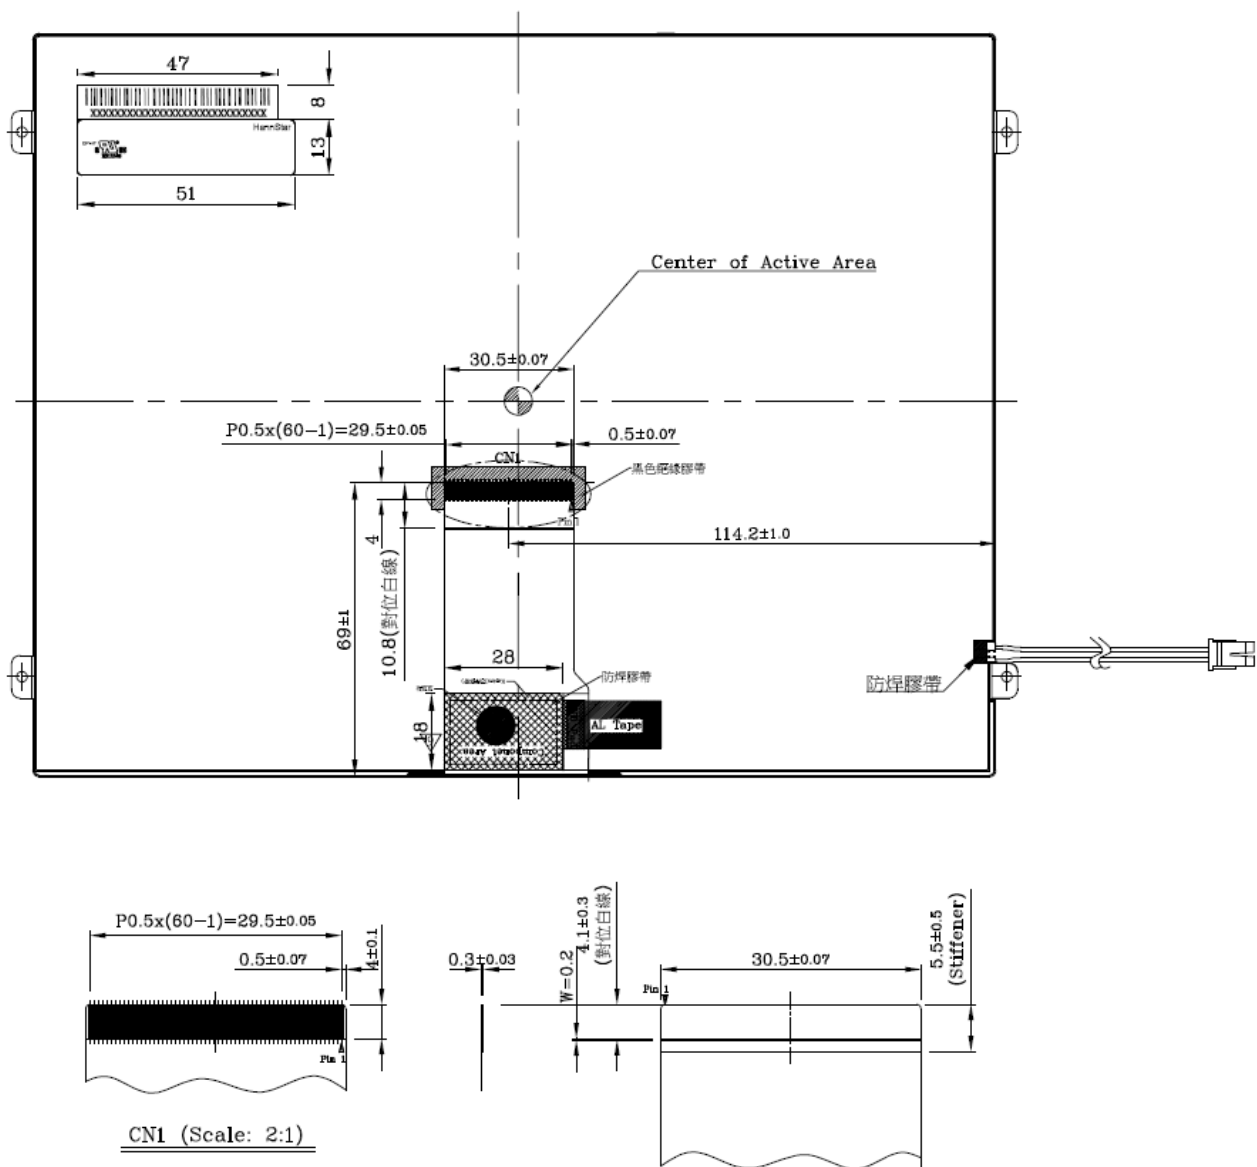

General tolerance: $\pm 0.3\text{mm}$

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

深圳市九扬智能科技有限公司


Document Title	HSD104IXN1-A00-1JC	Page No.	23/26
Document No.		Revision	1.0

10.0 PACKAGE SPECIFICATION

10.1 Packing form


LCM Model	Qty. in the Box	Inner Box Size(mm)	Notice
HSD104IXN1-A00	20 pcs/Box	Ref. 452 x 346 x 175 ^H	--

10.2 Packing assembly drawings

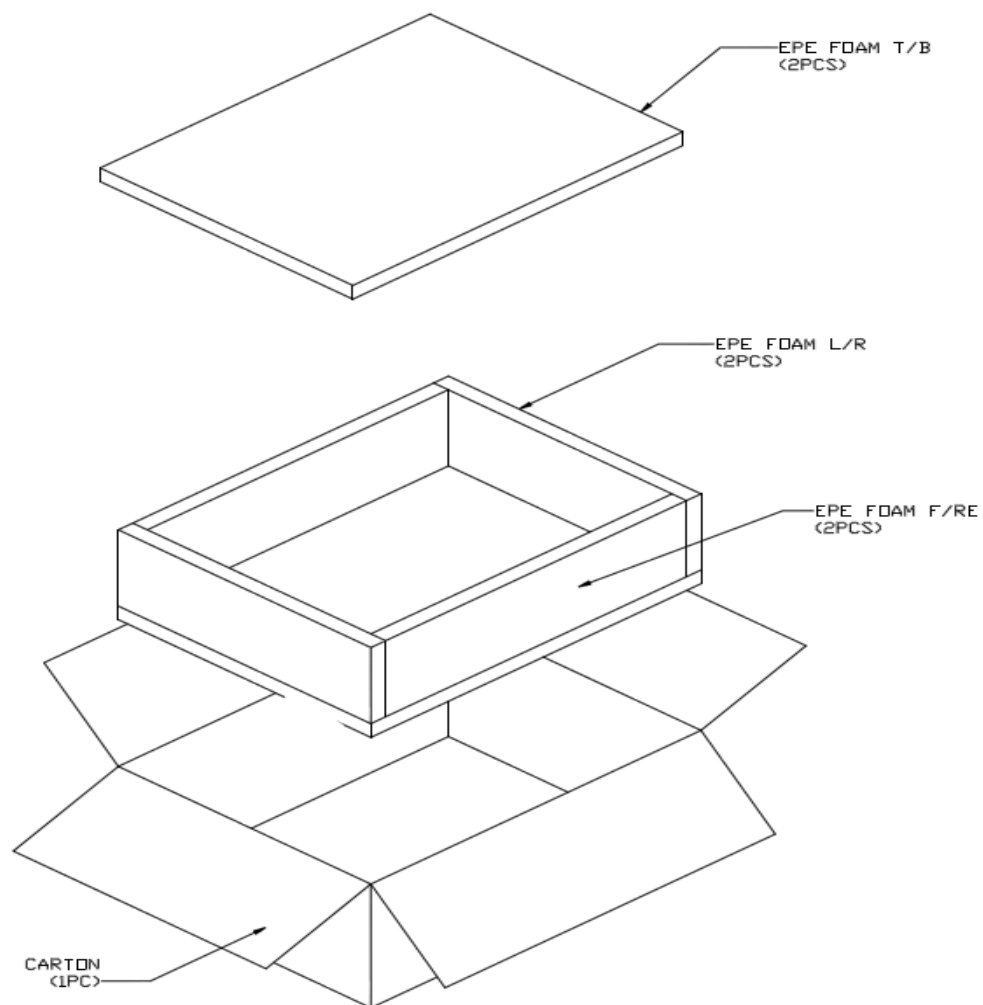

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	24/26
Document No.		Revision	1.0

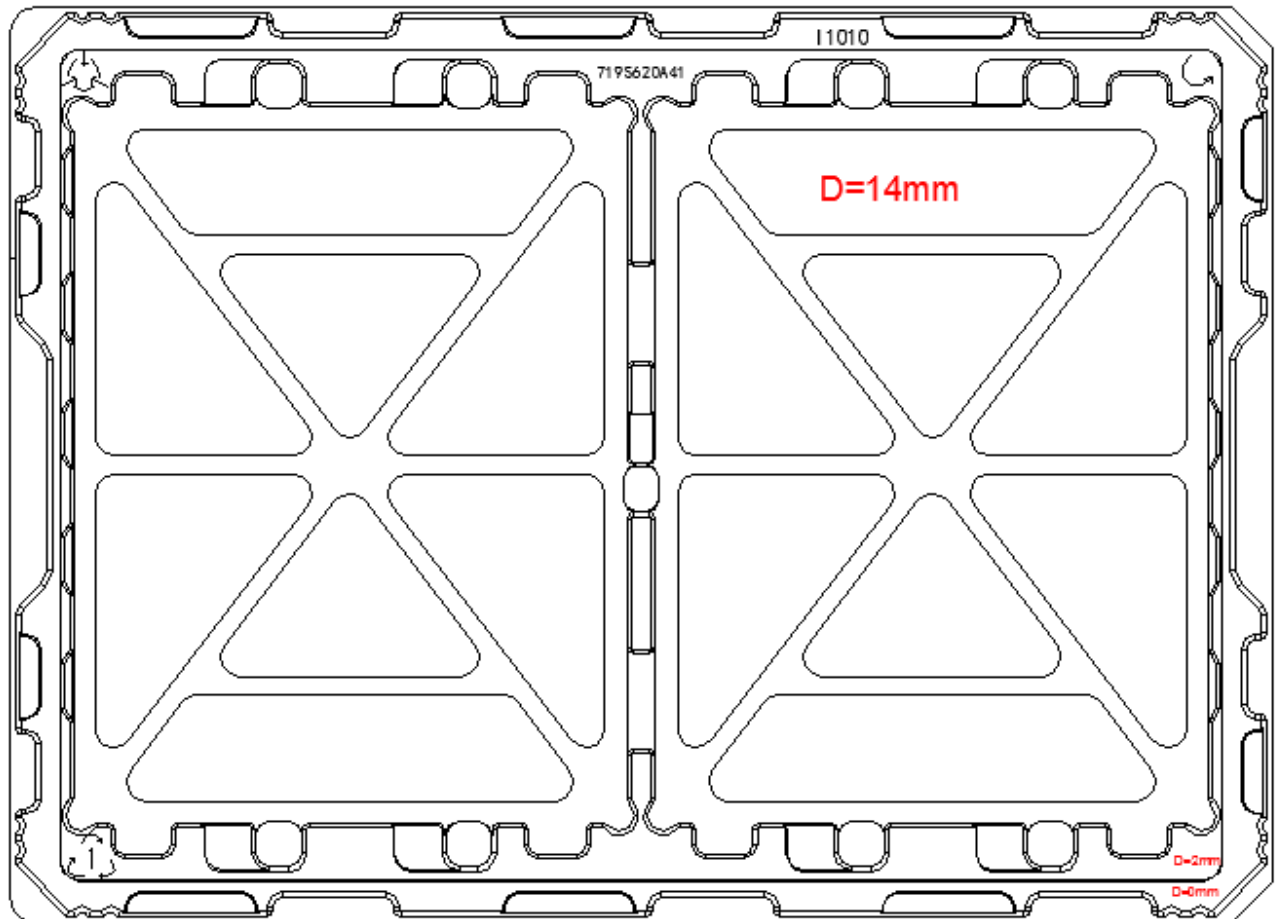

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	25/26
Document No.		Revision	1.0

11.0 GENERAL PRECAUTION

11.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

11.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

11.3 Breakage of LCD Panel

11.3.1. If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.

11.3.2. If liquid crystal contacts mouth or eyes, rinse out with water immediately.

11.3.3. If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.

11.3.4. Handle carefully with chips of glass that may cause injury, when the glass is broken.

11.4 Electric Shock

11.4.1. Disconnect power supply before handling LCD module.

11.4.2. Do not pull or fold the LED cable.

11.4.3. Do not touch the parts inside LCD modules and the fluorescent LED's connector or cables in order to prevent electric shock.

11.5 Absolute Maximum Ratings and Power Protection Circuit

11.5.1. Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.

11.5.2. Please do not leave LCD module in the environment of high humidity and high temperature for a long time.

11.5.3. It's recommended to employ protection circuit for power supply.

11.6 Operation

11.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead.

11.6.2 Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.

11.6.3 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.

深圳市九扬智能科技有限公司

Document Title	HSD104IXN1-A00-1JC	Page No.	26/26
Document No.		Revision	1.0

11.6.4 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.

11.6.5 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.

11.7 Mechanism

Please mount LCD module by using mounting holes arranged in four corners tightly.

11.8 Static Electricity

11.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.

11.8.2 Because LCD module use CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge. Persons who handle the module should be grounded through adequate methods.

11.9 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

11.10 Disposal

When disposing LCD module, obey the local environmental regulations.